


### Standard Features:


- Compact, reliable PTO pump capable of 500 to 1585 gpm with corresponding pressures of 37 to 15 psi using 17 to 26 hp
- Available with heavy duty two wheeled trailer or galvanized three point mount
- Designed with industry leading oil lubricated step up gearbox (no belts or pulleys) with shafts supported by widely spaced bearings
- Easily replaceable packing gland type water seal

### Options:

- 5" female thread discharge priming valve
- Hand primer
- Fluid filled pressure gauge
- Short suction adapter with 8" female pipe thread
- #6 heavy duty 1 $\frac{3}{8}$  six spline PTO shaft.

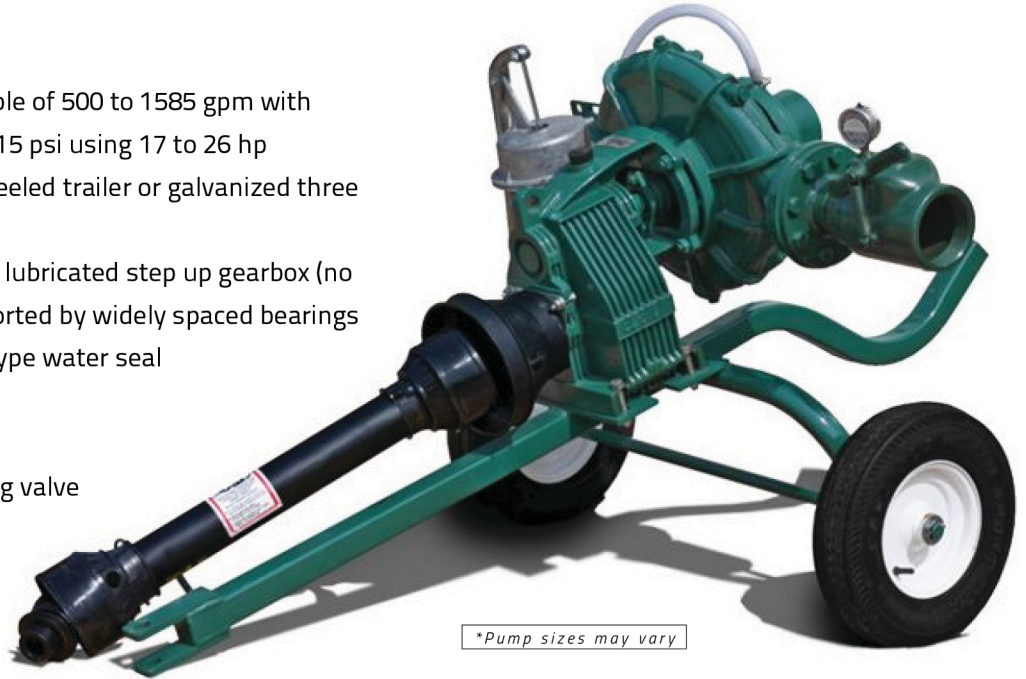

\*Pump sizes may vary

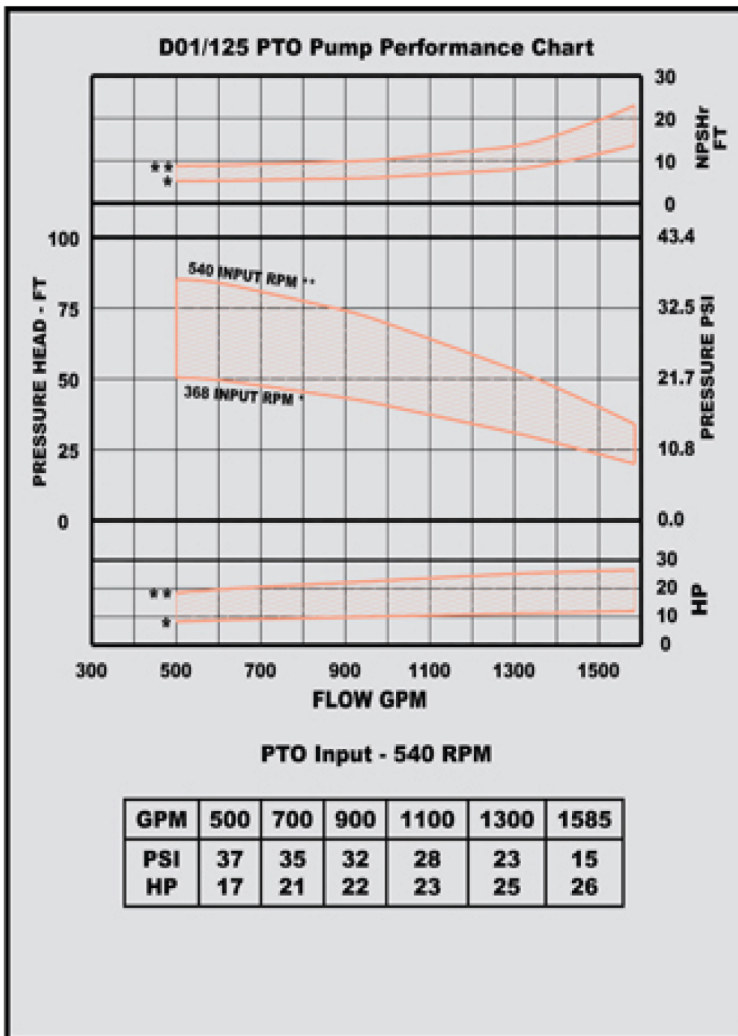

### Configurations:

- Bare Pump:** Pump only with weld-on companion flanges, gaskets, nuts and bolts
- Pump, Cart & Shaft:** Same as bare pump, but mounted on two-wheeled cart & PTO drive shaft
- Fully Fitted:** Same as pump, cart & shaft plus hand primer, check valve, pressure gauge and suction fittings

### Specifications:

- **Suction (A,B):** 150mm DIN Flange
- **Suction (C):** 8" NPTF
- **Discharge (A,B):** 125mm DIN Flange
- **Discharge (C):** 5" NPTF
- **Discharge Position:** Horizontal, Right Facing (When Standing Behind The Suction End)
- **Length:** 70 Inches
- **Width:** 54 Inches
- **Height:** 38 Inches
- **Weight (Unfitted):** 430 lbs.
- **Weight (Fitted):** 500 lbs.



The performance information contained herein is based on ideal conditions. Actual performance is affected by, but not limited to, location, operating conditions (Temperature, humidity & altitude) and human judgement. Idrofolgia USA reserves the right to change product specifications, designs, pricing and standard equipment without notice and without incurring obligation.