


Standard Features:

- Compact, reliable PTO pump capable of 50 to 330 gpm with corresponding pressures of 90 to 70 psi using 8.5 to 20 hp
- Available with heavy duty two wheeled trailer or galvanized three point mount
- Designed with industry leading oil lubricated step up gearbox (no belts or pulleys) with shafts supported by widely spaced bearings
- Easily replaceable packing gland type water seal


Options:

- 2" female thread discharge priming valve
- Hand primer
- Fluid filled pressure gauge
- Short suction adapter with 3" female pipe thread
- #6 heavy duty 1 $\frac{3}{8}$ six spline PTO shaft.

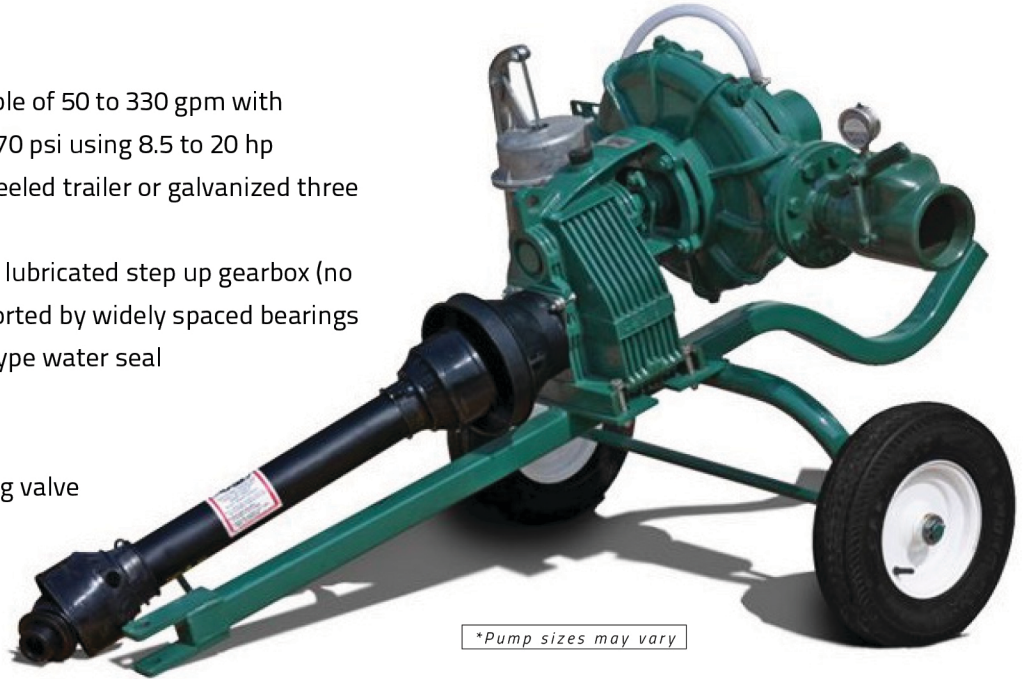

*Pump sizes may vary

Performance Curves:

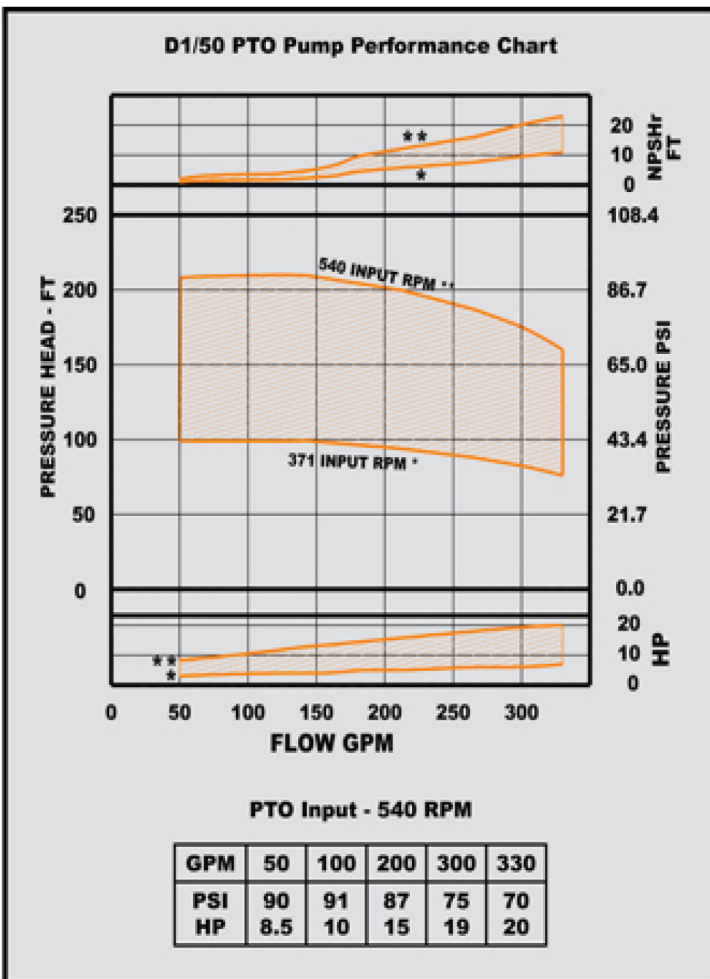

Configurations:

- Bare Pump:** Pump only with weld-on companion flanges, gaskets, nuts and bolts
- Pump, Cart & Shaft:** Same as bare pump, but mounted on two-wheeled cart & PTO drive shaft
- Fully Fitted:** Same as pump, cart & shaft plus hand primer, check valve, pressure gauge and suction fittings

Specifications:

- **Suction (A,B):** 65mm DIN Flanged
- **Suction (C):** Adapted to 3" NPTF
- **Discharge (A,B):** 50mm DIN Flanged
- **Discharge (C):** 2" NPTF
- **Discharge Position:** Horizontal, Right Facing (When Standing Behind The Suction End)
- **Length:** 62 Inches
- **Width:** 48 Inches
- **Height:** 36 Inches
- **Weight (Unfitted):** 200 lbs.
- **Weight (Fitted):** 220 lbs.

caprari
pumping power

The performance information contained herein is based on ideal conditions. Actual performance is affected by, but not limited to, location, operating conditions (Temperature, humidity & altitude) and human judgement. Idrofolgia USA reserves The right to change product specifications, designs, pricing and standard equipment Without notice and without incurring obligation.