


Standard Features:

- Compact, reliable PTO pump capable of 200 to 700 gpm with corresponding pressures of 167 to 143 psi using 44 to 84 hp
- Available with heavy duty two wheeled trailer or galvanized three point mount
- Designed with industry leading oil lubricated step up gearbox (no belts or pulleys) with shafts supported by widely spaced bearings
- Easily replaceable packing gland type water seal


Options:

- 4" female thread discharge priming valve
- Hand primer
- Fluid filled pressure gauge
- Short suction adapter with 5" female pipe thread
- #6 heavy duty 1 $\frac{3}{8}$ six spline PTO shaft.

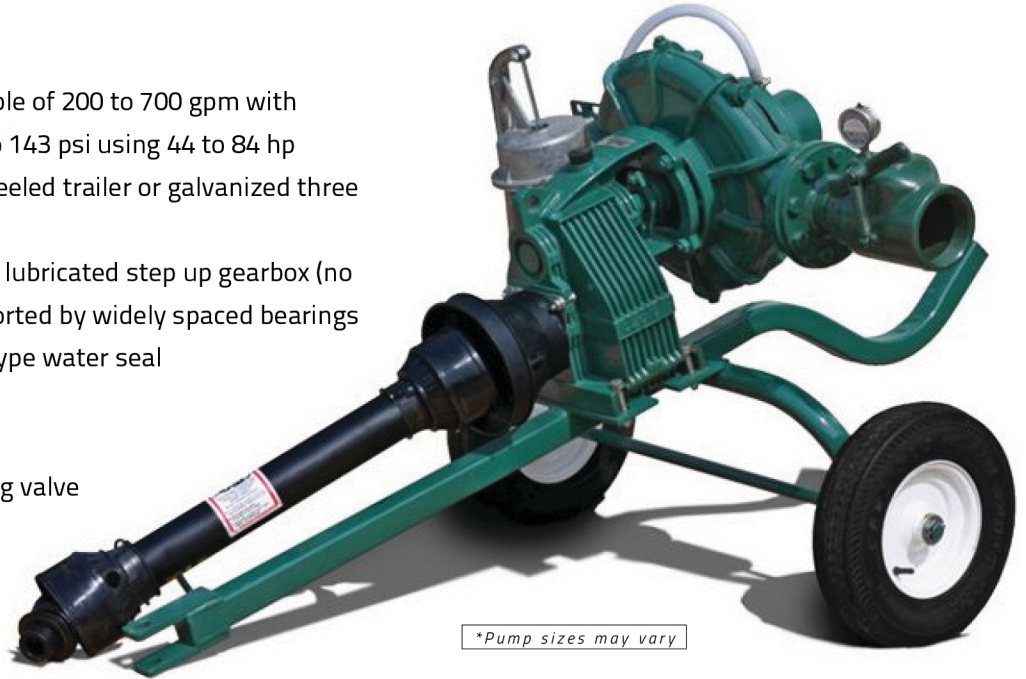

*Pump sizes may vary

D04/80 PTO Pump Performance Chart

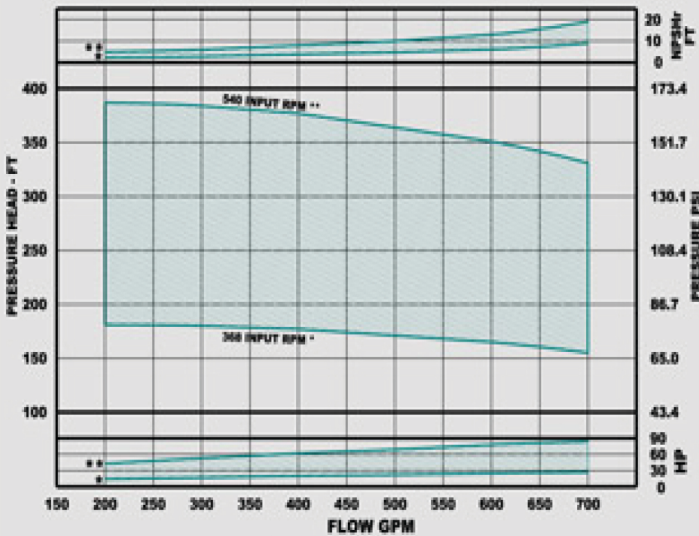

PTO Input - 540 RPM

GPM	200	300	400	500	600	700
PSI	167	166	163	159	152	143
HP	44	53	62	69	77	84

Configurations:

- Bare Pump:** Pump only with weld-on companion flanges, gaskets, nuts and bolts
- Pump, Cart & Shaft:** Same as bare pump, but mounted on two-wheeled cart & PTO drive shaft
- Fully Fitted:** Same as pump, cart & shaft plus hand primer, check valve, pressure gauge and suction fittings

Specifications:

- **Suction (A,B):** 100mm DIN Flange
- **Suction (C):** 5" NPTF
- **Discharge (A,B):** 80mm DIN Flange
- **Discharge (C):** 4" NPTF
- **Discharge Position:** Horizontal, Right Facing (When Standing Behind The Suction End)
- **Length:** 70 Inches
- **Width:** 54 Inches
- **Height:** 41 Inches
- **Weight (Unfitted):** 380 lbs.
- **Weight (Fitted):** 440 lbs.

caprari
pumping power

The performance information contained herein is based on ideal conditions. Actual performance is affected by, but not limited to, location, operating conditions (Temperature, humidity & altitude) and human judgement. Idrofolgia USA reserves the right to change product specifications, designs, pricing and standard equipment without notice and without incurring obligation.