


### Standard Features:


- Compact, reliable PTO pump capable of 200 to 800 gpm with corresponding pressures of 193 to 142 psi using 51 to 90 hp
- Available with heavy duty two wheeled trailer or galvanized three point mount
- Designed with industry leading oil lubricated step up gearbox (no belts or pulleys) with shafts supported by widely spaced bearings
- Easily replaceable packing gland type water seal

### Options:

- 4" female thread discharge priming valve
- Hand primer
- Fluid filled pressure gauge
- Short suction adapter with 5" female pipe thread
- #6 heavy duty 1 3/8 six spline PTO shaft.

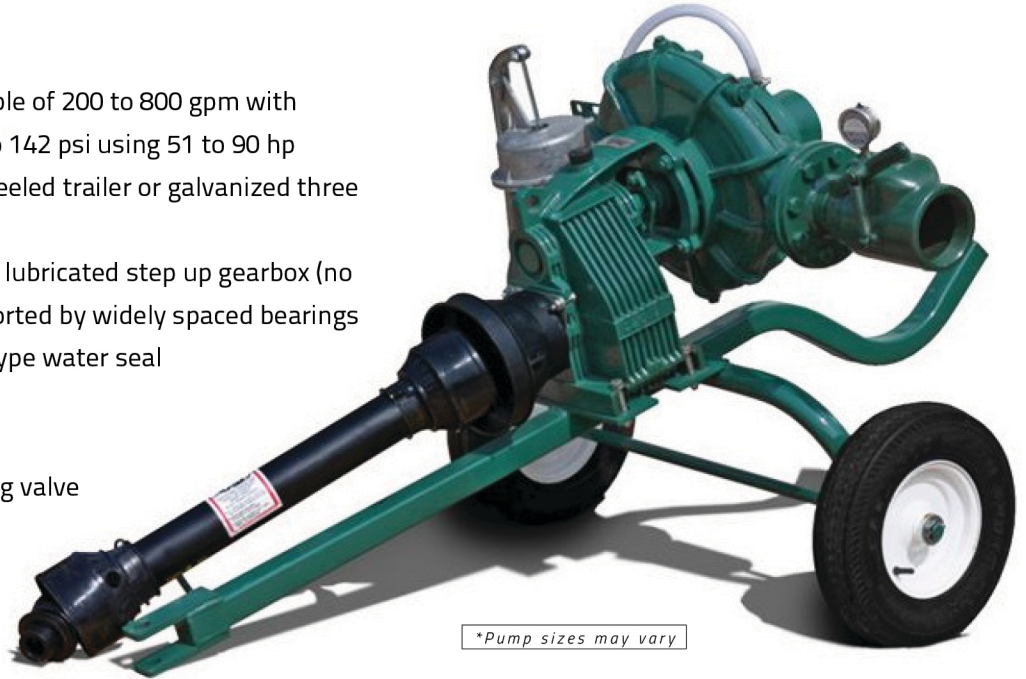

\*Pump sizes may vary

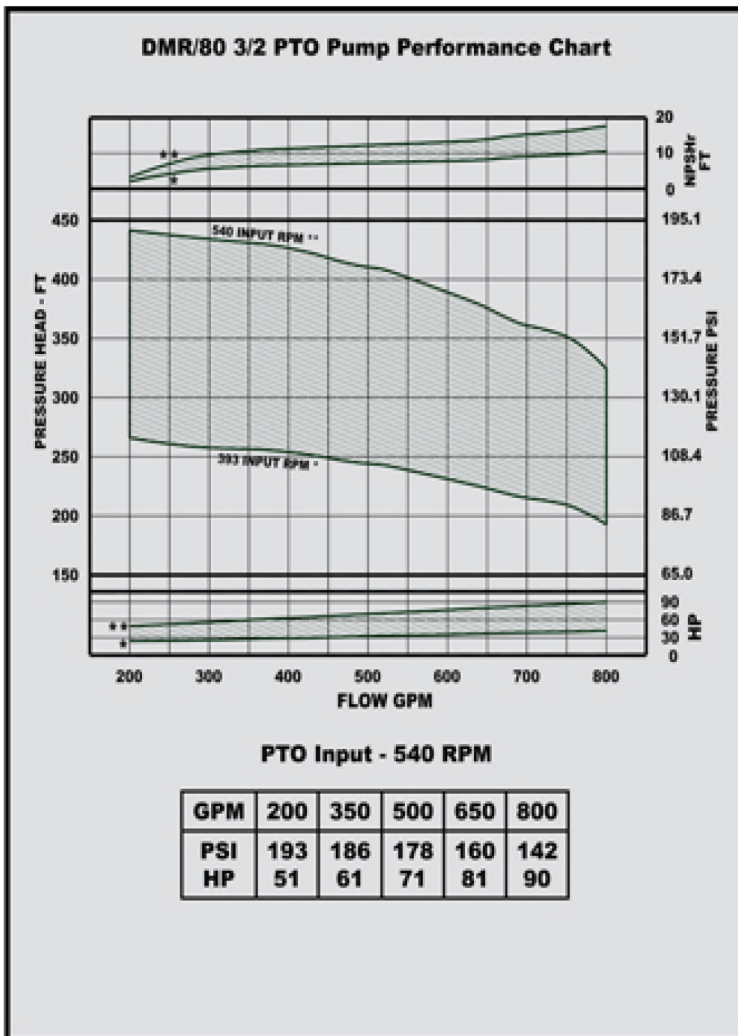

### Configurations:

- Bare Pump:** Pump only with weld-on companion flanges, gaskets, nuts and bolts
- Pump, Cart & Shaft:** Same as bare pump, but mounted on two-wheeled cart & PTO drive shaft
- Fully Fitted:** Same as pump, cart & shaft plus hand primer, check valve, pressure gauge and suction fittings

### Specifications:

- **Suction (A,B):** 100mm DIN Flange
- **Suction (C):** 5" NPTF
- **Discharge (A,B):** 80mm DIN Flange
- **Discharge (C):** 4" NPTF
- **Discharge Position:** Horizontal, Right Facing (When Standing Behind The Suction End)
- **Length:** 70 Inches
- **Width:** 54 Inches
- **Height:** 41 Inches
- **Weight (Unfitted):** 400 lbs.
- **Weight (Fitted):** 460 lbs.



The performance information contained herein is based on ideal conditions. Actual performance is affected by, but not limited to, location, operating conditions (Temperature, humidity & altitude) and human judgement. Idrofolgia USA reserves the right to change product specifications, designs, pricing and standard equipment without notice and without incurring obligation.