Maximum recommended horsepower

250 HP

* T	Total width			
	Working width			
8 7 8	Side shift			
₽	Min.recommended horsepower			
Δ.Ω	Machine weight			
L	Number of blades			

Wei							
T250			8 7 8	₽	4-7	L	
	in	in	in - in	HP	lbs	Nr.	
255	111	102	51 - 51	140	2600	60	
305	131	122	61 - 61	160	2865	72	
355	150	142	71 - 71	180	3130	84	

DELTA
IRRIGATION

TIGER


0	Machine weight with cage roller
\	Machine weight with spikes roller
0	Machine weight with packer roller
<i>90</i> 0	Machine weight with spiral roller
j	Number of spikes for frangor models
••	Number of tines for frangor models

T250F			₽2	0	\	0	<i>30</i> 00	İ	
	in	in	HP	lbs	lbs	lbs	lbs	Nr.	Nr.
255	111	102	140	3085	3085	3460	3260	50	80
305	131	122	160	3485	3485	3900	3660	60	96
355	150	142	180	3880	3880	4345	4655	70	112

TIGER 250

FRESA (T250)

Rotary tillers with "C" or "L" type blade rotor and side skids

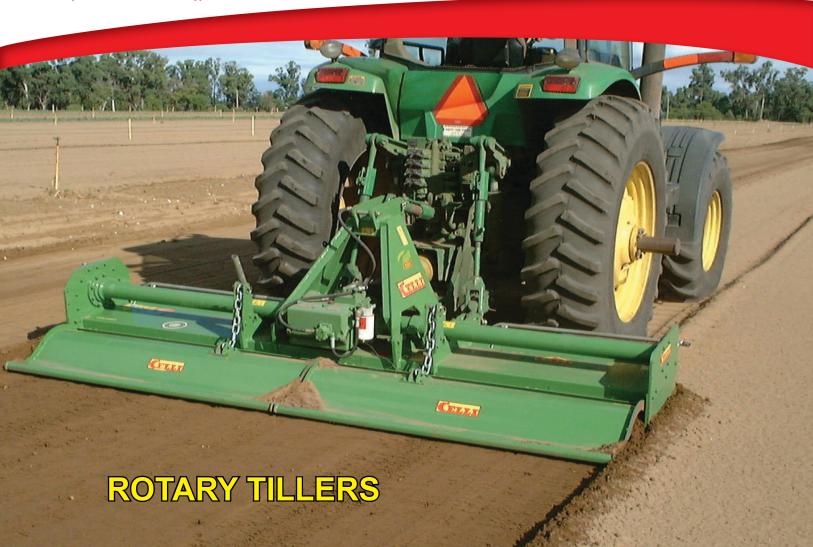





TIGER 250

NOTE: Straight tines rotor and hydraulic adjustment for rear roller are supplied on request

FRANGOR

The Frangor version is recommended for seedbed preparation when thorough soil refinement is required. It is different from the rotator tiller version due to the following modifications:

- -rotor shaft fitter with either spikes or straight tines for accurate soil finishing. The rotor shaft rotates faster than the rotary tiller
- rear swinging articulated tailgate that offers a wide range of adjustment positions
- rear levelling roller (available in cage, spikes and packer models)

TECHNICAL SPECIFICATIONS

- · Maximum horsepower 250 HP
- PTO 3-speed gearbox for 1000 rpm
- PTO 3-speed gearbox for 540 rpm (T250)
- · Gearbox oil cooler with radiator
- · Gear side transmission
- 3-point hitch cat. 2 and cat. 3
- · Swinging front linkages
- · Rear tailgate adjustment by threaded bar
- · Rotor with double welded flange with M16 bolts
- L-shaped blades: 3.15" x 0.4" (6 blades each flange, side blades leaning inwards)
- Adjustable cage roller 17.3" with threaded bar (T250l
- Spikes: 30x30 mm L= 6.7" (T250F)
- Working depth: 9.8" (T250): 8.7" (T250F)
- Foot stand (T250)
- · Drive shaft with clutch
- · Removable safety devices

ACCESSORIES

- Additional oil reservoir rather than oil cooler with radiator
- · C-shaped blades
- Side blades leaning outwards
- · Straight tines rotor
- · Side skids (PT250F)
- · Set of 2 front wheels
- Pair of rear rubber/steel wheels fitted with arms and reinforcement cross bar
- Rear rollers
- · Front track eraser
- · Front sod breaking discs
- · Hydraulic kit for roller adjustment
- Hydraulic kit for tailgate adjustment
- Rear hydraulic hitches for seeder
- · Drive shaft with automatic safety device



Spikes Roller



Spiral Roller



Cage Roller



Packer Roller







