











Maximum suggested horsepower

▶ **70 HP**

	Total width
	Working width
	Min. suggested horsepower
	Weight
	Hammer no.


VEGA/F					
	inches	inches	HP	pounds	Nr.
<b>125</b>	56"	49"	40	880	12
<b>150</b>	66"	59"	45	990	14
<b>175</b>	76"	69"	50	1100	16
<b>200</b>	86"	79"	60	1210	18



**DELTA**  
IRRIGATION

**VEGA/F**

**FIXED MULTI-PURPOSE MULCHER**

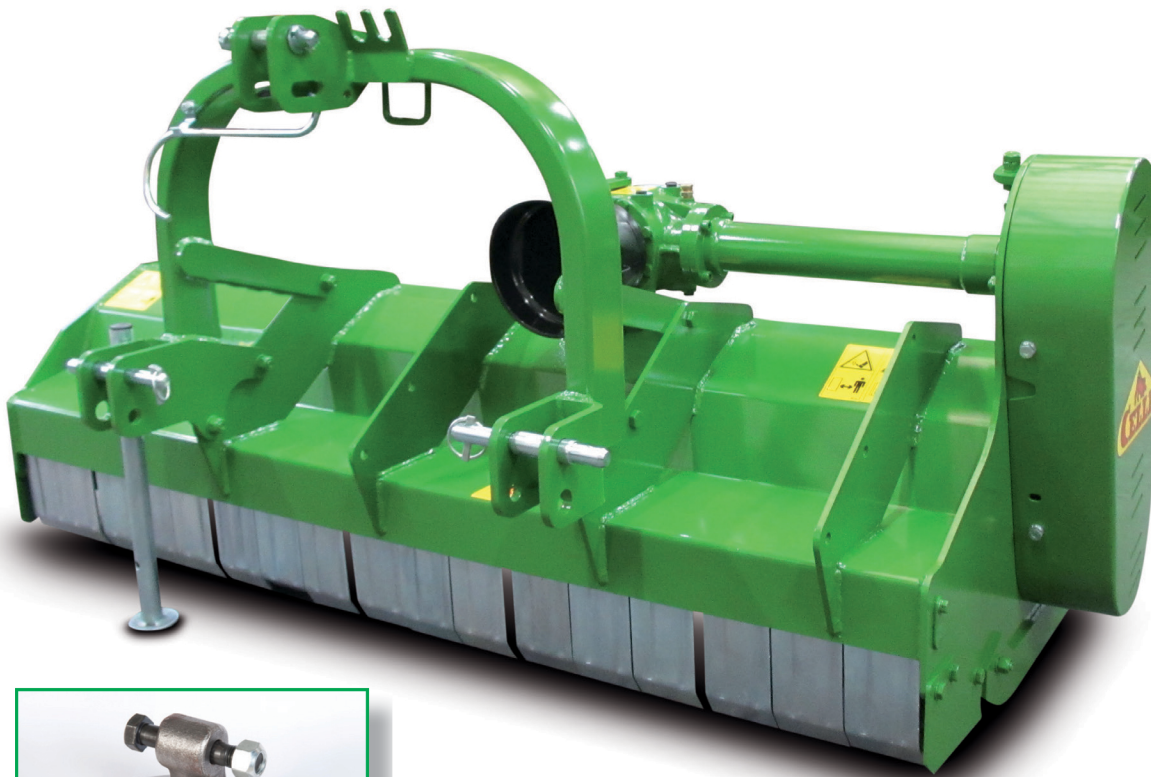

**FIXED MULTI-PURPOSE MULCHER**

Suitable for grass, greens, set-aside (1½")

**TECHNICAL SPECIFICATIONS**

- Maximum horsepower: 70HP
- PTO: 540 rpm 1 speed rotor: 2278  
Tip speed 156 ft/sec
- Side transmission with 3 belts mod. 125
- Side transmission with 4 belts mod. 150-175-200
- Fixed front and upper counterblades
- Rear roller 8"
- Gearbox with freewheel safety device
- 3 point hitch with 2 working positions (height adjustment 6 cm)
- 2 working positions
- Double shielded box frame
- Side protections
- Rotor ( pipe 55") with flat hammers
- Cardan shaft without safety device

**OPTIONAL ACCESSORIES**


- Y shaped blades with straight blade
- Set of 2 rear rubber wheels
- Rear hood openable for inspection
- Rear collection spike Model 125=5/9 pcs. 150=6/11 pcs. 175=7/13 pcs. 200=8/15 pcs.
- Side-skids
- Side skids protections to minimize wear (set of 2)



**Flat hammer (standard)**



**Y shaped blades with straight blade (optional)**

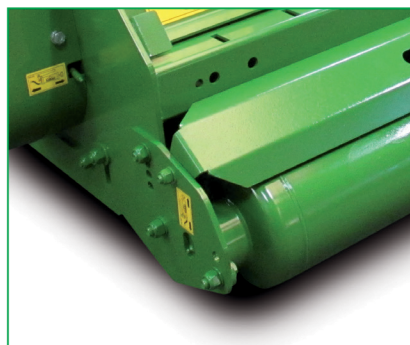

**Roller is separated from side-skids**

*Suitable for grass, greens, set-aside (1½" Diameter)*